

# USER MANUAL

## IMEC IE 93 HAND DRYER



Code: 300-1193

Please read user manual carefull before using.

## Characteristic




- 1) Touch free, just put hands below the wind spout within 15 cm.
- 2) To avoid power wasting due to continuous error induction by objects in the detection zone, it has been set with the function of power on over 0.5 second and power off automatically over 1 minute.
- 3) Design with 105 centigrade thermal cut off.
- 4) Drying time is 35-40 seconds.
- 5) High R.P.M. with low noise and dry hand quickly.
- 6) Easy to mount and install. Instruction included.
- 7) Curvaceous, smooth and elegant.

## Installation

- 1) The machine should be fixed on the firm and fastened wall.
- 2) Do not install the dryer on the wall which raw material is flammable.
- 3) Do not jam the wind mouth.
- 4) Please cut off the power immediately when the dryer occurs breakdown and please try to contact the seller for more information.
- 5) Forbid to wipe the outer shell with caustic liquid, such as banana water and alcohol.
- 6) Do not dismantle the dryer except by a professional.
- 7) Avoid the dangerous situation which can damage the cord. The power cord should be repaired by the maintenance team of manufacturer or similar agency's careerman.

# Installation Diagram

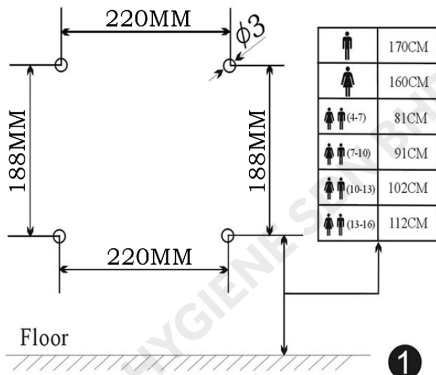

2

## Notice



Drill four holes on the wall as diagram 1. Then insert expansion tube into the hole. Fix the hook on the wall by enclosed spareparts hang the hand dryer on the hook by the fitting hardware on the back of the hand dryer. Push the hand dryer from up to down until it is tight as diagram 2. Connect the powerplug to the electrical power.

## Technical Data

Voltage	AC 220V / 50Hz
Rated Power	1500 W
Sensor Range	50~150 mm
Air Temperature	> 40°C (Envir. 25°C)

## Power Diagram

